

Hisense

400
SQ FT

PORTABLE AIR CONDITIONER
7,500 BTU (12,500 BTU, ASHRAE 12B equivalent)

AP1319HR1G



- Cooling, Heating, Fan, and Dehumidifier functions
- Low Noise Cooling System
- Powerful Cross-flow Fan Design
- Remote Control is included
- 2-year Warranty



4 Modes - Cool, Heat, Dehumidify, and Fan



Quiet Operation



Drain-free Operation (Cooling Mode)



Snap-assembly Window Kit

Cool Comfort - Quiet, Convenient, and Easy to Install

The Hisense AP1319HR1G Portable Air Conditioner with Heat Pump provides the utmost in performance more conveniently than ever. With 10,500 BTU of heat, it can be used year-round in temperate climates. Airflow is strong and quiet due to the new cross-flow fan design. Additionally, the louvers automatically open to a pre-set position after the unit is powered on. To adjust the automatic louver, press SWING once. Press SWING again to hold the louver at a desired direction. Preserve the external appearance of your home with the included, easy to install snap-assembly window kit, for windows 18" to 50" wide. This Hisense portable air conditioner cools, heats, dehumidifies, and can function in fan mode.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved

TECHNICAL SPECIFICATIONS


Performance	
Hisense-Model	AP1319HR1G
Maximum Cooling space	400 sq. ft.
Heating Capacity	10,500
Cooling Capacity (BTU)	7,500
Refrigerant	R-410A
Noise Level in dB(A)	49 - 51 dB(A)
Electrical	
Voltage / Freq / Amps	115V / 60Hz, 10.3A
Control Features	
Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	61 - 86 °F
Display Type	LED
Sleep Mode	Yes (on remote)
Dry Mode	Yes
Smart Mode	N/A
Cooling Speeds	3 Speed
Temp Display Units	°C / °F
Clock	N/A
Timer	24 Hr On / Off
Auto Restart	Yes
General Features	
Removable Filter	Yes
Washable PP Filter	Yes
Motorized Air Swing	Yes (on remote)
Vent System	Single Hose, 5.9"D x 59"L
Dehumidification	2.9 Pint / hr (at 26.7/19.4°C)
Airflow (CFM)	175 - 230
Accessories	
Remote Control	Yes
AAA Batteries	Yes
Air Hose	Yes
Window Kit and Draining Hose	Yes
Approvals	
Safety	ETL
Shipping	
Unit Dimension WxDxH (mm)	442 x 318 x 729

Carton Dimension WxDxH (mm)	498 x 386 x 885
Net Weight / Gross Weight (Kg)	32.5 / 35.5
Unit Dimension WxDxH (inch)	17.4 x 15.3 x 28.1
Carton Dimension WxDxH (inch)	19.6 x 15.3 x 34.9
Net Weight / Gross Weight (lbs)	71.6 / 78.8
Loading(40HQ)	425
Loading (53')	504 (Floor Loading)
Product	
Parts & Labor	2 years
UPC	819130023649



Control Panel

Window Size

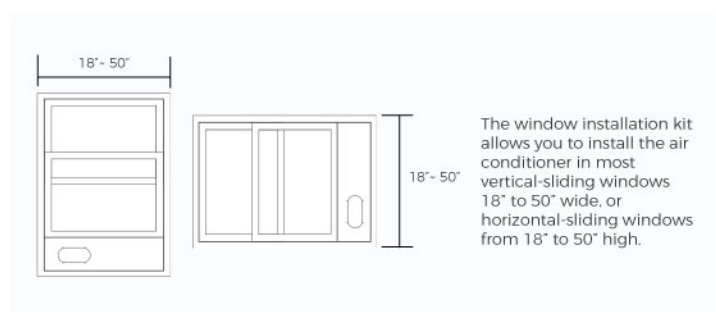

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

Hisense USA Corporation
7310 McCinnis Ferry Road, Suwanee, GA, 30024
1-877-465-3566
www.hisense-usa.com

