

Hisense

50 PINTS
DOE Test Procedure,
10 CFR part 430,
subpart B, appendix X

70 PINTS
DOE Test Procedure,
10 CFR part 430,
subpart B,
appendix X

DEHUMIDIFIER AUTO DRY
up to 1000 sq.ft. coverage

DH7019K1G



- Bucket full indicator avoids overflows
- 3 Modes - Auto, Continuous, Manual
- 2 Fan Speeds (High, Low, Auto)
- Low-temperature Operation (38°F)



Low Noise Airflow System

High-performance centrifugal fan ensures quiet operation, achieving just 46 dB(A) with the fan set on "Low".



Energy Efficient

Energy Star means its more energy efficient and helps reduce your utility bill.



Filter Indicator

Washable filter helps to reduce bacteria, odors and particles.



Warranty

2 Years Parts & Labor.

Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH7019K1G Energy Star 70* Pint 2-Speed Dehumidifier quietly collects water into the slide-out internal bucket, or can discharge the water via connecting a garden hose (not included) through the side of the cabinet. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Three operating modes (manual set, continuous and auto dry) and the very low sound level make this a versatile choice. Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shutoff.

Hisense

50 PINTS
DOE Test Procedure:
11CFR part 430,
subpart B, appendix X1

70 PINTS
DOE Test Procedure:
11CFR part 430,
subpart B, appendix X1

DEHUMIDIFIER AUTO DRY
up to 1000 sq.ft. coverage

DH7019K1G

TECHNICAL SPECIFICATIONS


| Performance | |
|-------------------------------------|--------------------------------|
| Hisense-Model | DH7019K1G |
| Dehumidification (Pints / 24 hours) | 70* |
| Dehumidification (Pints / 24 hours) | 50** |
| Heating Capacity | N/A |
| Coverage | Up to 1000 sq. ft. |
| Refrigerant | R-410A |
| Noise Level in dB(A) | 46-49 dB(A) |
| Electrical | |
| Voltage / Freq / Amps | 115V / 60Hz, 6.3A* / 4.9A** |
| General Features | |
| Unit Control Type | Electronic |
| Fan Control | Button |
| Adj. Humidity Control | Yes |
| Display Type | LED |
| Continuous Run | Yes |
| Auto Dry | Yes |
| Manual Setting | 30% ~ 80% |
| Timer-Clock | Yes |
| Fan Speeds | 2 Speeds (Lo, Hi, Auto) |
| Pump Mode | No |
| General Features | |
| Auto Bucket Shutoff | Yes |
| Bucket Capacity | 16.3 pints |
| Bucket Shutoff Capacity | 13.3 pints |
| Garden Hose Connection | Yes - garden hose not included |
| Washable Filters | Yes |
| Max Pump Discharge Height | N/A |
| Accessories | |
| Quick Connect Hose | No |
| Approvals | |
| Safety | UL |
| Energy | Energy Star |
| Shipping | |
| Unit Dimension WxDxH (mm) | 387 x 300 x 628 |
| Carton Dimension WxDxH (mm) | 430 x 332 x 667 |

| Net Weight / Gross Weight (Kg) | 18.9 / 20.8 |
|---------------------------------|--------------------|
| Unit Dimension WxDxH (inch) | 15.2 x 11.8 x 24.7 |
| Carton Dimension WxDxH (inch) | 16.9 x 13.1 x 26.3 |
| Net Weight / Gross Weight (lbs) | 41.6 / 45.8 |
| Loading (40HQ) | 774 |
| Loading (53') | 864 (floor loaded) |
| Product | |
| Parts & Labor | 2 years |
| UPC | 00819130023670 |

Note:

* : DOE Test Procedure 10 CFR part 430, subpart B, appendix X;

** : DOE Test Procedure 10 CFR part 430, subpart B, appendix X1;

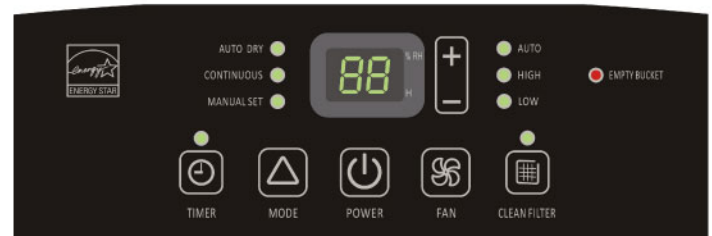

Control Panel



Gravity Draining with Garden Hose (not included)

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA, All rights reserved

Hisense USA Corporation
7310 McCinnis Ferry Road, Suwanee, GA, 30024
1-877-465-3566
www.hisense-usa.com

