

Hisense

50 PINTS
DOE Test Procedure,
10 CFR part 430,
subpart B, appendix X)

70 PINTS
DOE Test Procedure,
10 CFR part 430,
subpart B,
appendix X

DEHUMIDIFIER BUILT-IN PUMP
up to 1000 sq.ft. coverage

DH7019KP1WG



- Bucket full indicator avoids overflows
- 3 Modes - Auto, Continuous, Manual
- 2 Fan Speeds (High, Low, Auto)
- Low-temperature Operation (38°F)



Built-in Pump for Easy Draining

Built-in pump and Quick-connect water hose included to discharge the water into a sink or basement window



Energy Efficient

Energy Star means its more energy efficient and helps reduce your utility bill.



Filter Indicator

Washable filter helps to reduce bacteria, odors and particles.



Warranty

2 Years Parts & Labor.

Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH7019KP1WG Energy Star 70* Pint 2-Speed Dehumidifier has a built-in pump that can quietly discharge water out a basement window or into a sink using the included quick-connect hose. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Three operating modes (manual set, continuous and auto dry) and the very low sound level make this a versatile choice. Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shutoff.



TECHNICAL SPECIFICATIONS	
Performance	
Hisense-Model	DH7019KP1WG
Dehumidification (Pints / 24 hours)	70*
Dehumidification (Pints / 24 hours)	50**
Heating Capacity	N/A
Coverage	Up to 1000 sq. ft.
Refrigerant	R-410A
Noise Level in dB(A)	47-50 dB(A)
Electrical	
Voltage / Freq / Amps	115V / 60Hz. 6.3A* / 4.9A**
General Features	
Unit Control Type	Electronic
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	30% ~ 80%
Timer-Clock	Yes
Fan Speeds	2 Speeds (Lo. Hi. Auto)
Pump Mode	No
General Features	
Auto Bucket Shutoff	Yes
Bucket Capacity	16.3 pints
Bucket Shutoff Capacity	13.3 pints
Garden Hose Connection	Yes - garden hose not included
Washable Filters	Yes
Max Pump Discharge Height	16 feet (head)
Accessories	
Quick Connect Hose	Yes, included (9mm dia)
Approvals	
Safety	UL
Energy	Energy Star
Shipping	
Unit Dimension WxDxH (mm)	387 x 300 x 628
Carton Dimension WxDxH (mm)	430 x 332 x 667

Net Weight / Gross Weight (Kg)	19.5 / 21.3
Unit Dimension WxDxH (inch)	15.2 x 11.8 x 24.7
Carton Dimension WxDxH (inch)	16.9 x 13.1 x 26.3
Net Weight / Gross Weight (lbs)	43 / 46.9
Loading (40HQ)	774
Loading (53')	864 (floor loaded)
Product	
Parts & Labor	2 years
UPC	00819130023687


Note:

* : DOE Test Procedure 10 CFR part 430, subpart B, appendix X;

** : DOE Test Procedure 10 CFR part 430, subpart B, appendix X1;



Control Panel

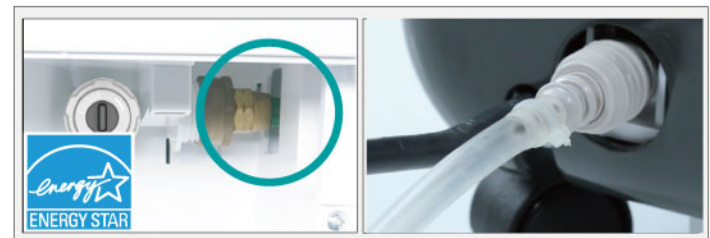

Draining hose with Quick Connector(Included)

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024

1-877-465-3566

www.hisense-usa.com

