

# Hisense

Equivalent to  
Previous  
**35/50**  
PINTS

**DEHUMIDIFIER** AUTO DRY  
up to 1000 sq ft coverage

Model **DH5020K**



- Bucket Full Indicator Avoids Overflows
- 3 Modes – Auto, Continuous, Manual
- 3 Fan Speeds – High, Low, Auto
- Low-temperature Operation (38°F)



#### Low Noise Airflow System

High-performance centrifugal fan ensures quiet operation, achieving just 46 dB(A) with the fan set on "Low"



#### Energy Efficient

Energy Star means its more energy efficient and helps reduce your utility bill.



#### Filter Indicator

Washable filter helps to reduce bacteria, odors, and particles.



#### Warranty

Two (2) years Parts & Labor

## Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH5020K Energy Star 35\* Pint 2-Speed Dehumidifier quietly collects water into the slide-out internal bucket or can discharge the water via connecting a garden hose (not included) through the side of the cabinet. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Easy control and the very low sound level make this a versatile choice. Additional features include an adjustable humidistat, easily accessible and washable filter, and full-tank alert.

Note:

\*: New DOE test procedure, equivalent to previous 50 Pints:

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2020 Hisense USA, All rights reserved

## TECHNICAL SPECIFICATIONS

Performance	
Model #	DH5020K
Dehumidification (Pints/24 hours)	35*
Heating Capacity	N/A
Coverage	Up to 1000 sq ft
Refrigerant	R-410A
Noise Level in dB(A)	47-49 dB(A)
Electrical	
Voltage / Freq / Amps	115V / 60Hz / 3.4A
General Features	
Unit Control Type	Electronic
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	30% - 80%
Timer-Clock	Yes
Fan Speeds	3 Speeds (HIGH AUTO LOW)
Pump Mode	No
Refrigeration Compartment	
Auto Bucket Shutoff	Yes
Bucket Capacity	11.4 pints
Bucket Shutoff Capacity	9.1 pints
Garden Hose Connection	Yes - garden hose not included
Washable Filters	Yes
Max Pump Discharge Height	N/A
Accessories	
Quick Connect Hose	No
Approvals	
Safety	UL
Energy	Energy Star
Shipping	
Unit Dimension WxDxH (mm)	356 x 273 x 507
Carton Dimension WxDxH (mm)	405 x 335 x 535
Net Weight /Gross Weight (kg)	15.5 / 17.4

Unit Dimension WxDxH (inch)	14 x 10.7 x 20.0
Carton Dimension WxDxH (inch)	15.9 x 13.2 x 21.1
Net Weight /Gross Weight (lbs)	34.1 / 38.3
Loading (40HQJ)	1020
Loading (53')	1008 (floor loaded)
Warranty/UPC	
Parts & Labor	2 Years
UPC	819130027081

Note:


\*: New DOE test procedure, equivalent to previous 50 Pints:

## Product Images

Control Panel



Gravity draining with garden hose (not included)

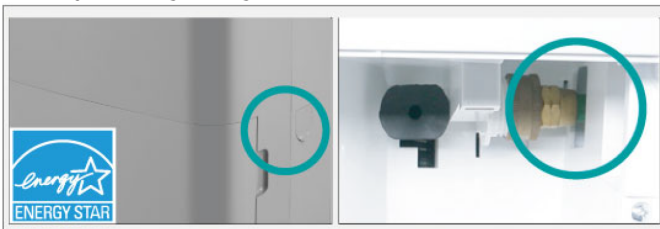

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2020 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com

