

Hisense

Equivalent
to Previous
60/100
PINTS

DEHUMIDIFIER BUILT-IN PUMP
up to 1500 sq ft coverage

MODEL **DH10020KP1WG**



- Built-in Pump, quick-connect hose included
- 3 Modes - Auto, Continuous, Manual
- 3 Fan Speeds - High, Med, Low



Commercial-power Dehumidification

Perfect for flood damage or very wet large spaces



Built-in Pump for Easy Draining

Built-in pump and Quick-connect water hose included to discharge the water into a sink or basement window



Low Noise Airflow System

Achieves just 49 dB(A) with the fan set on "Low"



Warranty

Two (2) years Parts & Labor

Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH10020KP1WG 60* Pint 3-Speed Dehumidifier has a built-in pump that can quietly discharge water out a basement window or into a sink using the included quick-connect hose. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Three operating modes (manual set, continuous, and auto dry) and the very low sound level make this a versatile choice. Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shut off.

Note:

*: New DOE test procedure, equivalent to previous 100 Pints:

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

TECHNICAL SPECIFICATIONS

Performance

Model #	DH10020KP1WG
Dehumidification (Pints/24 hours)	60*
Heating Capacity	N/A
Coverage	Up to 1500 sq ft
Refrigerant	R-410A
Noise Level in dB(A)	49-51 dB(A)

Electrical

Voltage / Freq / Amps	115V / 60Hz / 7.0A
-----------------------	--------------------

General Features

Unit Control Type	Electronic
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	30% - 80%
Timer-Clock	Yes
Fan Speeds	3 Speeds (HIGH MID LOW)
Pump Mode	Yes

Refrigeration Compartment

Auto Bucket Shutoff	Yes
Bucket Capacity	20.1 pints
Bucket Shutoff Capacity	14.8 pints
Garden Hose Connection	Yes - garden hose not included
Washable Filters	Yes
Max Pump Discharge Height	16 feet (head)

Accessories

Quick Connect Hose	Yes. included (9mm dia)
--------------------	-------------------------

Approvals

Safety	ETL
Energy	DOE

Shipping

Unit Dimension WxDxH (mm)	474 x 351 x 630
Carton Dimension WxDxH (mm)	535 x 406 x 665
Net Weight /Gross Weight (kg)	27.5 / 30.5

Unit Dimension WxDxH (inch)	18.7 x 13.8 x 24 .8
Carton Dimension WxDXH (inch)	21.1 x 16.0 x 26.2
Net Weight /Gross Weigh t (lbs)	60.6 / 67.2
Loading (40HQJ)	494
Loading (53')	624 (floor loaded)
Warranty/UPC	
Parts & Labor	2 Years
UPC	819130026848

Note:


*: New DOE test procedure, equivalent to previous 100 Pints:

Product Images

Control Panel



Draining hose with Quick Connector(Included)

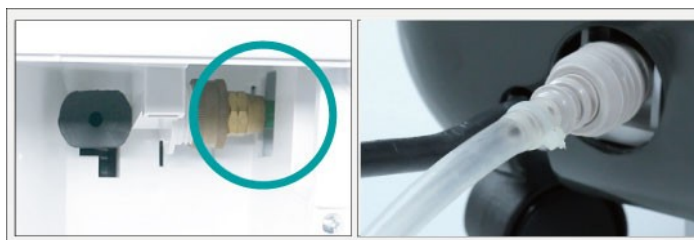

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved



Hisense USA Corporation
7310 McGinnis Ferry Road Suwanee, GA 30024
1-877-465-3566
www.hisense-usa.com