

Hisense

700
SQ FT

PORTABLE **AIR CONDITIONER**
10,000 BTU (12,000 BTU, ASHRAE 128 equivalent)

MODEL **AP70020HR1GD**



- 10,000 BTU Heating Power for Year-Round Use
- Low Noise Cooling System
- Remote Control is Included
- 2-year Warranty



Dual Hose Design Provides Faster Cooling by Reducing Negative Air Pressure in The Room



4 Modes - Cool, Heat, Dehumidify, and Fan



Drain-free Operation



Snap-assembly Window Kit



Dual Display with Dimmer for Easy Temperature Reading

Cool Comfort- Quiet, Convenient, and Easy to Install

The Hisense AP70020HR1GD Portable Air Conditioner provides Fast Cooling with its Dual Hose design, by reducing the negative air pressure in your room. Also, with 10,000 BTU of heat, combined with cool, dehumidify, and fan modes, is versatile for use year-round in temperate climates. Airflow is strong and quiet due to the cross-flow fan design. To make it easier to see the room temperature, the additional LED display on the front panel can be easily read from across the room. Finally, the easy to install snap-assembly window kit fits windows 18" to 50" wide, helping preserve the external appearance of your home.

Hisense

700
SQ FT

PORTABLE AIR CONDITIONER
10,000 BTU (12,000 BTU, ASHRAE 128 equivalent)

MODEL **AP70020HR1GD**

TECHNICAL SPECIFICATIONS

Performance	
Model #	AP70020HR1GD
Maximum Cooling space	700 sq. ft
Heating Capacity (BTU)	10,000
Cooling Capacity (BTU)	10,000
Refrigerant	R-32
Noise Level in dB(A)	50 - 53 dB(A)

Electrical

Voltage/ Freq / Amps	115V / 60Hz / 12A
----------------------	-------------------

Control Features

Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	61 - 86°F
Display Type	LED (Front and Top)
Sleep Mode	Yes (on remote)
Dry Mode	Yes
Smart Mode	N/A
Cooling Speeds	3 Speed
Temp Display Units	°C / °F
Clock	N/A
Timer	24 Hr On/Off
Auto Restart	Yes

General Features

Removable Filter	Yes
Washable PP Filter	Yes
Motorized Air Swing	Yes (on remote)
Vent System	Dual Hose, 5.9"D x 59"L
Dehumidification	3.3 Pint / hr (at 26.7/ 19.4°C)
Airflow (CFM)	165 - 215

Accessories

Remote Control	Yes
AAA Batteries	Yes
Air Hose	Yes
Window Kit and Draining Hose	Yes

Approvals

Safety	ETL
--------	-----

Shipping


Unit Dimension WxDxH (mm)	442 x 365 x 729
Carton Dimension WxDxH (mm)	495 x 465 x 885
Net Weight /Gross Weight (kg)	36.3 /39.5

Unit Dimension WxDxH (inch)	17.4 x 14.4 x 28.7
Carton Dimension WxDxH (inch)	19.5 x 18.3 x 34.8
Net Weight /Gross Weight (lbs)	80.0 /87.7
Loading (40HQ)	358
Loading (53')	504 (Floor Loading)
Warranty/UPC	
Parts & Labor	2 Years
UPC	819130026985

Control Panel



Window Size

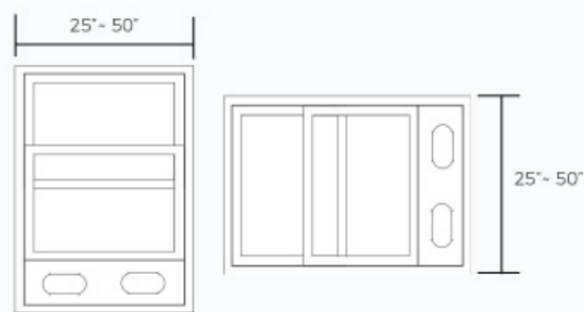

The window installation kit allows you to install the air conditioner in most vertical sliding windows 25" to 50" wide, or horizontal-sliding windows from 18" to 50" high.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2020 Hisense USA. All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road Suwanee, GA 30024
1-877-465-3566

www.hisense-usa.com

