Hisense

Quick Start Guide

3.1CH Soundbar with wireless subwoofer & Dolby Atmos
Model: HS312

◾◾ Dolby Atmos

❽ Bluetooth®   **HDMI™** HIGH-DEFINITION MULTIMEDIA INTERFACE   **4K HDR**   **Roku TV Ready** ✓ Simple setup ✓ One remote ✓ Quick settings

---

📦 What's in the Box

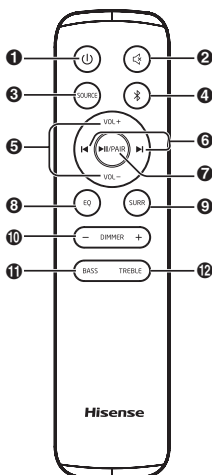|				
Main Unit	Remote Control / AAA Batteries x 2	Wireless Subwoofer	HDMI Cable	Optical Cable
Wall Mounting Screws (x2) / Brackets (x2) / Bracket Screw (x2) / Wall Anchors (x2)		AC Power Cord x2	User Manual/Quick Start Guide/ Wall Mount Guide	

---

1 Remote control

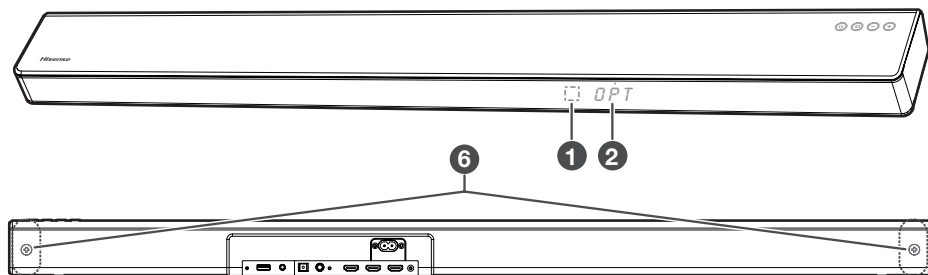|		
① ⏻		Switch the unit between ON and STANDBY mode.
② ⊲ *(MUTE)*		Mute or resume the sound.
③ **SOURCE**		Select the play function.
④ ✳ *(BT)*		Select the Bluetooth mode.
⑤ **VOL+/VOL−**		Increase/decrease the volume level.
⑥ I◄/►I		Skip to previous/next track in Bluetooth/USB mode.
⑦ ►II/**PAIR**		Play/pause/resume playback in Bluetooth/USB mode.
		Press and hold to activate the pairing function in Bluetooth mode or disconnect the existing paired Bluetooth device.
⑧ **EQ**		Select a preset sound effect.
⑨ **SURR**		Adjust the surround ON/OFF.
⑩ **DIMMER+/-**		Adjust display brightness.
⑪ **BASS**		Press to activate the bass setup.
⑫ **TREBLE**		Press to activate the treble setup.

Replace the Remote Control Battery

1. Press and slide the back cover to open the battery compartment of the remote control.

2. Insert two AAA size batteries (included). Make sure the (+) and (–) ends of the batteries match the (+) and (–) ends indicated in the battery compartment.

3. Close the battery compartment cover.

- Do not mix old and new batteries;
- Do not mix alkaline, standard (Carbon-Zinc) or rechargeable (Ni-Cd, Ni- MH, etc.) batteries.

2 Identifying the Parts

Main Unit

1 **Remote Control Sensor**
Receive signal from the remote control.
2 **Display Window**
Show the current status.
3 ⏻ (**ON/OFF**) button
Switch the unit between ON and Standby mode.
4 ⭲ (**SOURCE**) button
Select the play function.
5 **VOL+/VOL-** buttons
Increase/decrease the volume level.
6 **Screws**
Remove the screws then install the wall mounting screws into the back of the unit.
7 **USB** Socket
Insert the USB device to play music.
8 **LINE IN** Socket
Connect to an external audio device.
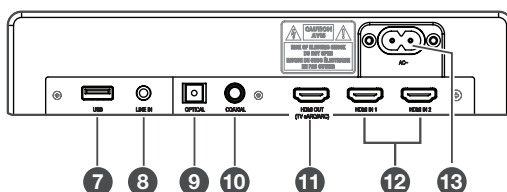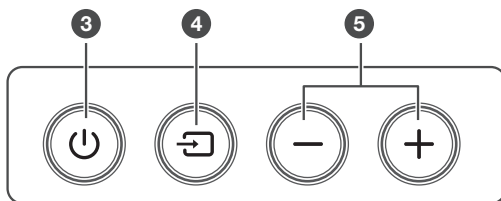9 **OPTICAL** Socket
10 **COAXIAL** Socket
11 **HDMI OUT (ARC)** Socket
Connect to a TV via HDMI cable.
12 **HDMI IN 1 / HDMI IN 2** Sockets
13 **AC~ Socket**
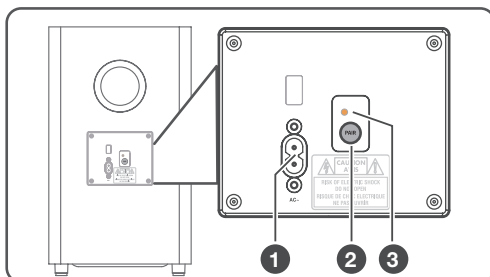Connect to the power supply.

Wireless Subwoofer

1 **AC~ Socket**
Connect to power.
2 **PAIR button**
Press activate the pairing function between the main unit and the subwoofer.
3 **PAIR Indicator**
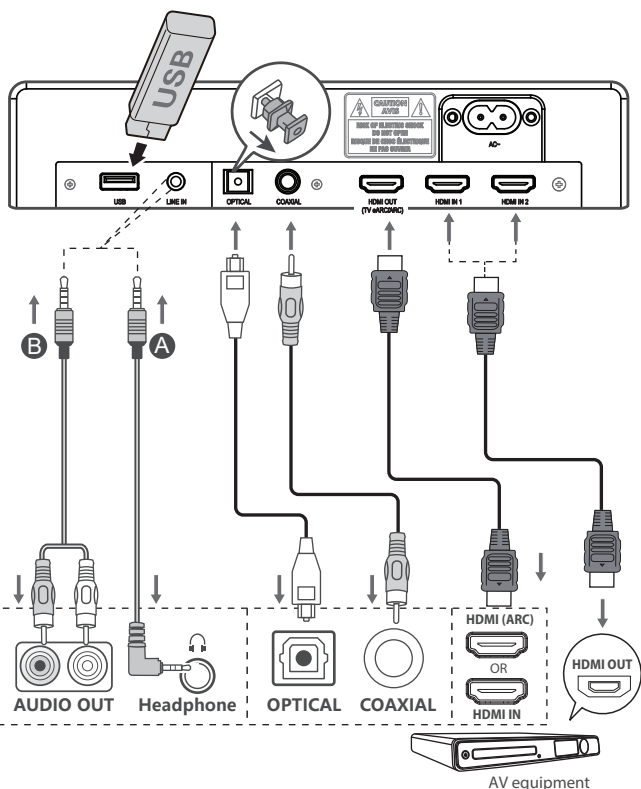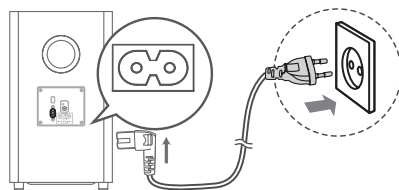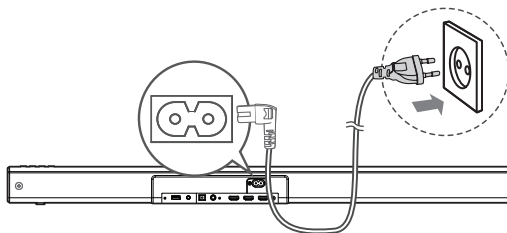Light stops blinking once the Subwoofer is paired with the Soundbar.

3 Connections

• DolbyAtmos

Dolby Atmos® is available only in HDMI mode.

1. To use Dolby Atmos® in HDMI 1 and HDMI 2 mode, Your TV had to support Dolby Atmos® or HDMI audio passthrough.

2. Make sure that "No Encoding" is selected for bitstream in the audio output of the connected external device (e.g. Blu-ray DVD player, TV etc.).

3. While entering Dolby Atmos / Dolby Digital / PCM format, the soundbar will show DOLBY ATMOS / DOLBY AUDIO / PCM AUDIO.

4. While the soundbar is using Dolby Atmos audio, you can only adjust the bass level of the subwoofer. All other EQ effects will not be available.
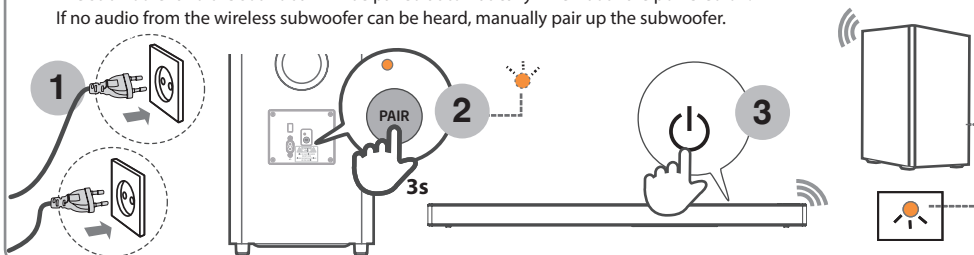
USB

LINE IN   OPTICAL   COAXIAL   HDMI OUT (TV eARC/ARC)   HDMI IN 1   HDMI IN 2   AC~

B   A

TV

AUDIO OUT   Headphone   OPTICAL   COAXIAL   HDMI (ARC) OR HDMI IN   HDMI OUT

AV equipment

● Before connecting the AC power cord, ensure you have completed all other connections.

◎ Pair up with the subwoofer

The subwoofer and the soundbar will be paired automatically when both are powered on.
If no audio from the wireless subwoofer can be heard, manually pair up the subwoofer.

1

2 PAIR 3s

3

4 Basic Operation

◎ Standby/ON

When you first connect the main unit to the mains socket, the main unit will be in Standby mode.

- Press the ⏻ button on the unit or on the remote control to switch the unit ON.
- Press the ⏻ button again to switch the unit back to STANDBY mode.
- Disconnect the mains plug from the mains socket if you want to switch the unit OFF completely.

Auto Wake

If a TV or an external device is connected, the unit will switch on automatically when the TV or the external device is switched on.

Automatic Power Off Function

The unit automatically turns to Standby mode after about 15 minutes if the TV or the external unit is disconnected, switched off.

◎ Select Modes

Press the ⇄ (SOURCE) button repeatedly on the unit or the SOURCE button on the remote control to select the LINE IN, OPTICAL, COAXIAL, HDMI ARC, HDMI 1, HDMI 2, BT (Bluetooth) and USB mode. The selected mode will show on the display.

## ◎ Adjust the Bass/Treble Level

- Press TREBLE then press VOL+/- button to increase or decrease the treble. (TREBLE+8 / TREBLE–8)
- Press BASS then press VOL+/- button to increase or decrease the bass. (BASS+8 / BASS–8)
- After about 5 seconds, the unit will exit from bass/treble setting. The display will show the current selected mode. You may now press the VOL+ / - buttons to adjust volume.

◎ Turn the Surround Sound ON/OFF

Press the **SURR** button on the remote control to turn on the surround sound. Press this button again to turn off the surround sound.

◎ Adjust the Volume

Press the **VOL+ / VOL-** buttons on the unit or on the remote control to adjust the volume.
If you wish to turn the sound off, press the ⋪ (MUTE) button on the remote control. Press the ⋪ (MUTE) button again or press the **VOL+ / VOL-** buttons to resume normal listening.

◎ Adjust the Brightness

Press the **DIMMER +/-** buttons on the remote control to select brightness level.

◎ Select a Preset Sound Effect

While playing, press the **EQ** button on the remote control to select desired preset equalizers: MOVIE, MUSIC, NEWS.

5 Bluetooth(✻) Operation

< 8 m / 27 ft

① ② Settings **Bluetooth** — Bluetooth — DEVICES — **Hisense HS312** Connected — Now Discoverable ③