

# Hisense

**8000**  
BTU

WINDOW AIR CONDITIONER  
With Inverter Technology & ConnectLife App

Model **AW0822TW1W**  
**350 Sq. Ft.**



- Inverter technology ensures energy efficiency and ultra-quiet operation: 36 dBA
- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- ConnectLife app allows easy control from anywhere
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort
- Meets ENERGY STAR® standards, saving on energy costs



Excellent Energy Efficiency



Ultra-Quiet Operation



ConnectLife Smart App



115 Volt / 15 Amps



Google and Android are trademarks of Google LLC.



Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

The Hisense AW0822TW1W Window Air Conditioner is best suited for smaller rooms (350 sq. ft. or less), delivering 8,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Its energy-efficient design meets ENERGY STAR® requirements, and inverter technology ensures ultra-quiet operation for a peaceful night's sleep. Includes a remote control that puts easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved.

# Hisense

# 350 SQ. FT

Window Air Conditioner

8,000 BTU

Model AW0822TW1W

Model #	AW0822TW1W
<b>Performance</b>	
Cooling Capacity (BTUs/ hr)	8000
CEER	15
Coverage	350 sq ft
Dehumidification Pint/ 24 hr	21.6
Refrigerant	R-32/ 270g
Airflow (CFM) (High/ LOW)	178-206
Noise Level in dB	52
<b>Electrical</b>	
Voltage/ Freq/ Amps	115 - 60/ 7.2, N/A
Plug Type/ NEMA#	A/ 5-15P
Watts-cooling	670
Electrical Receptacle	115V/ 15A
Power Cord Length (feet)	6ft. (1.8m)
<b>Control Features</b>	
Thermostat Type	Electronic
Fan Speeds - Cool/Fan	3/ 3
Display Type	LED
Timer	YES
<b>Unit Features</b>	
Chassis Type	Fixed
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES, Easy Access
<b>Accessories</b>	
Installation Kit	YES
Remote Control	YES
<b>Approvals</b>	
Safety	cULus
Energy Star	YES

### Product Dimensions

Unit Dimension W x H x D (mm)	480×370×545
Net Weight (kg) (fits Not included)	23
Unit Dimension W x H x D (inch)	18.90×14.57×21.46
Net Weight (lbs) (fits Not included)	50.7
<b>Product</b>	
Parts & Labor	2 years
UPC	819130029863

Note:


\*: Rated Amps(A) / accorded UL 60335 Safety

### Product Images

#### Sleek Design with Touch Control



#### Window Opening

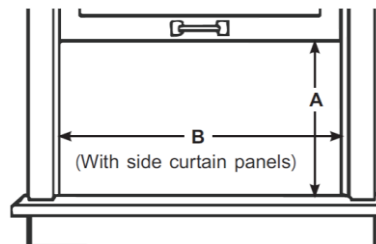

A: 13 3/5" (34.5cm) min

B: 24 1/2" (62.2cm) - 39"  
(99.1cm)

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com