

Hisense

10,000
BTU

WINDOW AIR CONDITIONER
With ConnectLife App

Model **AW1022CW1W**
450 Sq. Ft.



- Sleek electronic touch control
- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- ConnectLife app allows easy control from anywhere
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort
- Meets ENERGY STAR® standards, saving on energy costs



**Sleek Electronic
Touch Controls**



**3 Comfort Modes –
cools, dehumidifies &
ventilates**



ConnectLife Smart App



115 Volt / 15 Amps



Google and Android are trademarks of Google LLC.



Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

The Hisense AW1022CW1W Window Air Conditioner with Heat is best suited for smaller rooms (450 sq. ft. or less), delivering 10,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Its energy-efficient design meets ENERGY STAR® requirements, while sleek electronic touch controls and included remote control puts easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved.

Hisense

450
SQ. FT

Window Air Conditioner

10,000 BTU

Model AW1022CW1W

| | |
|-------------------------------|------------------|
| Model # | AW1022CW1W |
| performance | |
| Cooling Capacity -(BTUs/hr) | 10000 |
| CEER | 11.4 |
| Coverage | 450 sq ft |
| Dehumidification Pint / 24 hr | 33.6 |
| Refrigerant | R-32 /370g |
| Airflow (CFM)(High/LOW) | 171-224 |
| NOise Level in dB(A) | 53/57 |
| Electrical | |
| Voltage / Freq / Amps | 115 - 60/7.7,N/A |
| Plug Type / NEMA# | A / 5-15P |
| Watts-cooling | 870 |
| Electrical Receptacle | 115V/15A |
| Power Cord Length (feet) | 6'(1.8m) |
| Control Features | |
| Thermostat Type | Electronic |
| Fan Speeds - Cool/Fan | 3/3 |
| Display Type | LED |
| Timer | YES |
| Unit Features | |
| Chassis Type | Fixed |
| Air Deflection | 4-Way |
| Air Discharge Type | Top |
| Washable Filter | Yes, Easy Access |
| Accessories | |
| Installation Kit | YES |
| Remote Control | 9 |
| Approvals | |
| Safety | cULus |
| Energy Star | YES |

| | |
|-------------------------------------|-----------------------|
| Product Dimensions | |
| Unit Dimension W x H x D (mm) | 470 × 330 × 445 |
| Net Weight (kg)(fits NOT included) | 23 |
| Unit Dimension WxHxD (inch) | 18.50 × 12.99 × 17.52 |
| Net Weight (lbs)(fits NOT included) | 50.7 |
| Product | |
| Parts & Labor | Two years |
| UPC | 819130029764 |

NOte:


*: Rated Amps(A) / accorded UL 60335 Safety

Product Images

Sleek Design with Touch Control



Window Opening

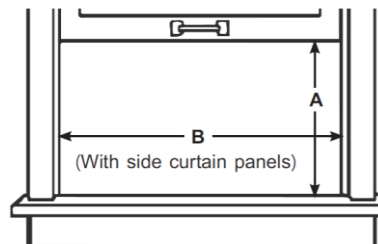

A: 13 3/5" (34.5cm) min

B: 24 1/2" (62.2cm) - 39" (99.1cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-888-935-8880
www.hisense-usa.com