

# Hisense

**18,000**  
BTU

WINDOW AIR CONDITIONER  
With ConnectLife App

Model **AW1822CW3W**  
**1000 Sq. Ft.**



- Energy-efficient design helps save money
- Sleek and easy electronic touch controls
- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- ConnectLife smart app allows easy control from anywhere
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort
- Meets ENERGY STAR® standards, saving on energy costs



Sleek Electronic  
Touch Controls



Energy-Efficient  
Operation



ConnectLife Smart App



230 Volt / 15 Amps



Google and Android are trademarks of Google LLC.



Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

The Hisense AW1822CW3W Window Air Conditioner with Heat is best suited for larger rooms (1000 sq. ft. or less), delivering 18,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Its energy-efficient design meets ENERGY STAR® requirements, while sleek electronic touch controls and remote control put easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

# Hisense

# 1000 SQ. FT

Window Air Conditioner

18,000 BTU

Model AW1822CW3W

Model #	AW1822CW3W
<b>Performance</b>	
Cooling Capacity-(BTUs/ hr)	17700/18000
CEER	11.21
Coverage	1000 sq ft
Dehumidification Pint 24 hr	64.8
Refrigerant	R-32/ 630g
Airflow (CFM) (High/ LOW)	360-450
Noise Level in dB	55/ 57
<b>Electrical</b>	
Voltage/ Freq/ Amps	208/ 230- 60/ 7.9, 7.2*, N/A
Plug Type / NEMA#	B/ 6-15P
Watts-cooling	1570/ 1600
Electrical Receptacle	230V/ 15A
Power Cord Length (feet)	6ft. (1.8m)
<b>Control Features</b>	
Thermostat Type	Electronic
Fan Speeds - Cool/Fan	3/ 3
Display Type	LED
Timer	YES
<b>Unit Features</b>	
Chassis Type	Slide-out
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES, Easy Access
<b>Accessories</b>	
Installation Kit	YES
Remote Control	YES
<b>Approvals</b>	
Safety	cULus
Energy Star	YES

### Product Dimensions

Unit Dimension W x H x D (mm)	600×455×640
Net Weight (kg) (fits Not included)	48.5
Unit Dimension W x H x D (inch)	23.62×17.91×25.20
Net Weight (lbs) (fits Not included)	106.9
<b>Product</b>	
Parts & Labor	2 years
UPC	819130029740

Note:


\*: Rated Amps(A) / accorded UL 60335 Safety

### Product Images

#### Sleek Design with Touch Control



#### Window Opening

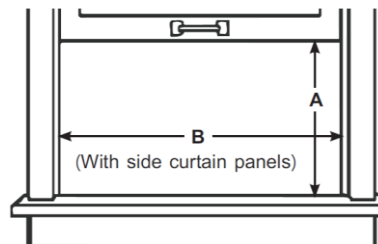

A: 18 1/2" (47cm) min

B: 29 3/5" (75.2cm) - 42 1/10" (106.9cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com