

# Hisense

**24,000**  
BTU

WINDOW AIR CONDITIONER  
With ConnectLife App

Model **AW2422CW3W**  
**1500 Sq. Ft.**



- Energy-efficient design helps save money
- Sleek and easy electronic touch controls
- 3 modes (Cooling, Fan, Dehumidifier) for versatile comfort
- ConnectLife smart app allows easy control from anywhere
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort



**Sleek Electronic  
Touch Controls**



**Energy-Efficient  
Operation**



**ConnectLife Smart App**



**230 Volt / 20 Amps**



The Hisense AW2422CW3W Window Air Conditioner is best suited for larger rooms (1500 sq. ft. or less), delivering 24,000 BTU of cooling power. It provides three modes of comfort – cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Its energy-efficient design helps save on utility costs, while sleek electronic touch controls and remote control put easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

Model #	AW2422CW3W
<b>Performance</b>	
Cooling Capacity -(BTUs/ hr)	24000/23700
CEER	9.4
Coverage	1500 sq ft
Dehumidification Pint / 24 hr	178
Refrigerant	R-32/ 710g
Airflow (CFM) (High/ LOW)	429-517
Noise Level in dB(A)	50/ 59
<b>Electrical</b>	
Voltage/ Freq/ Amps	208/ 230- 60/ 11.0/ 12.1*, N/A
Plug Type/ NEMA#	C/ 6-20P
Watts-cooling	2480/ 2470
Electrical Receptacle	240V/ 20A
Power Cord Length (feet)	6ft. (1.8m)
<b>Control Features</b>	
Thermostat Type	Electronic
Fan Speeds - Cool/ Fan	3/ 3
Display Type	LED
Timer	YES
<b>Unit Features</b>	
Chassis Type	Slide-out
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES, Easy Access
<b>Accessories</b>	
Installation Kit	YES
Remote Control	YES
<b>Approvals</b>	
Safety	cULus
Energy Star	YES


<b>Product Dimensions</b>	
Unit Dimension W x H x D (mm)	673*472*669
Net Weight (kg) (fits Not included)	58
Unit Dimension W x H x D (inch)	26.50×18.58×26.34
Net Weight (lbs) (fits Not included)	128
<b>Product</b>	
Parts & Labor	2 years
UPC	819130029689

NOte:


\*: Rated Amps(A) / accorded UL 60335 Safety

## Product Images

### Sleek Design with Touch Control



### Window Opening

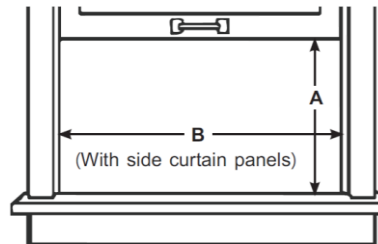

A: 19 1/7" (48.6cm) min

B: 32 1/3" (82.2cm) - 44" (111.8cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com