

Hisense

24K/11K
BTU
COOL/HEAT

WINDOW AIR CONDITIONER
With Heat

Model **AW2422DR3W**
1500 Sq. Ft.



- 4 modes (Heating, Cooling, Fan, Dehumidifier) for versatile comfort
- Sleek and easy electronic touch controls
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort
- Low-noise airflow system ensures quiet operation



**Sleek Electronic
Touch Controls**



**4 Modes – heating,
cooling, dehumidify and
ventilate**



**Remote Control
Included**



230 Volt / 20 Amps

The Hisense AW2422DR3W Window Air Conditioner with Heat is best suited for larger rooms (1500 sq. ft. or less), delivering 24,000 BTU of cooling power and 11,000 BTU of heating power. It provides four modes of comfort – heating, cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. A convenient remote control puts easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved.

Hisense

1500 SQ. FT

Window Air Conditioner

24,000 BTU

Model AW2422DR3W

Model #	AW2422DR3W
Performance	
Cooling Capacity -(BTUs/hr)	24000/ 23700
CEER	9.4
Coverage	1500 sq ft
Dehumidification Pint/ 24 hr	178
Refrigerant	R-32/710g
Airflow (CFM) (High/ LOW)	429-517
Noise Level in dB	50/ 59
Electrical	
Voltage/ Freq/ Amps	208/ 230 - 60/ 11.2/12.2*, N/A
Plug Type / NEMA#	C /6-20P
Watts-cooling	2520/ 2490
Electrical Receptacle	240V/ 20A
Power Cord Length (feet)	6ft. (1.8m)
Control Features	
Thermostat Type	Electronic
Fan Speeds- Cool/ Fan	3/ 3
Display Type	LED
Timer	YES
Unit Features	
Chassis Type	Slide-out
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES, Easy Access
Accessories	
Installation Kit	YES
Remote Control	YES
Approvals	
Safety	cULus
Energy Star	NO

Product Dimensions


Unit Dimension W x H x D (mm)	670*470*670
Net Weight (kg) (fits Not included)	58
Unit Dimension W x H x D (inch)	26.4×18.5×26.4
Net Weight (lbs) (fits Not included)	128
Product	
Parts & Labor	2 years
UPC	819130029917

Note:


*: Rated Amps(A) / accorded UL 60335 Safety

Product Images

Sleek Design with Touch Control



Window Opening

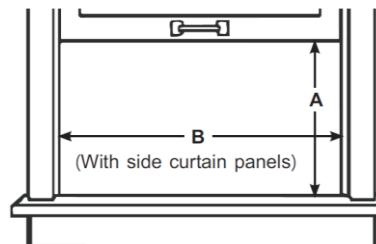

A: 19 1/7" (48.6cm) min

B: 32 1/3" (82.2cm) - 44" (111.8cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-888-935-8880
www.hisense-usa.com