

# Hisense

**24K/11K**  
BTU  
COOL/HEAT

WINDOW AIR CONDITIONER  
With Heat

Model **AW2422DR3W**  
**1500 Sq. Ft.**



- Meets ENERGY STAR® standards, saving on energy costs
- 4 modes (Heating, Cooling, Fan, Dehumidifier) for versatile comfort
- Sleek and easy electronic touch controls
- Remote control for easy, convenient operation
- 2-year warranty provides peace of mind
- Washable, removable filter for quick, easy cleaning
- 4-way air direction provides even, consistent comfort
- Low-noise airflow system ensures quiet operation



Sleek Electronic  
Touch Controls



4 Modes – heating,  
cooling, dehumidify and  
ventilate



Remote Control  
Included



230 Volt / 20 Amps



The Hisense AW2422DR3W Window Air Conditioner with Heat is best suited for larger rooms (1500 sq. ft. or less), delivering 24,000 BTU of cooling power and 11,000 BTU of heating power. It provides four modes of comfort – heating, cooling, fan, or dehumidifier – allowing you to choose the comfort you want at any time. The washable air filter is easy to remove and easy to clean, keeping it fresh and free from unwanted odors and bacteria. Its energy-efficient design meets ENERGY STAR® requirements, while a convenient remote control puts easy operation right at your fingertips. Backed by a 2-year warranty on both parts and labor.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved.

# Hisense

# 1500 SQ. FT

Window Air Conditioner

24,000 BTU

Model AW2422DR3W

Model #	AW2422DR3W
<b>performance</b>	
Cooling Capacity -(BTUs/hr)	24000/23700
CEER	9.4
Coverage	1500 sq ft
Dehumidification Pint / 24 hr	178
Refrigerant	R-32 /710g
Airflow (CFM)(High/LOW)	429-517
NOise Level in dB(A)	50/59
<b>Electrical</b>	
Voltage / Freq / Amps	208/230 - 60/11.2/12.2,N/A
Plug Type / NEMA#	C /6-20P
Watts-cooling	2520/2490
Electrical Receptacle	240V/20A
Power Cord Length (feet)	6'(1.8m)
<b>Control Features</b>	
Thermostat Type	Electronic
Fan Speeds - Cool/Fan	3/3
Display Type	LED
Timer	YES
<b>Unit Features</b>	
Chassis Type	Slide-out
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES,Easy Access
<b>Accessories</b>	
Installation Kit	YES
Remote Control	9
<b>Approvals</b>	
Safety	cULus
Energy Star	YES


<b>Product Dimensions</b>	
Unit Dimension W x H x D (mm)	670*470*670
Net Weight (kg)(fits NOT included)	58
Unit Dimension WxHxD (inch)	26.4 × 18.5 × 26.4
Net Weight (lbS)(fits NOT included)	128
<b>Product</b>	
Parts & Labor	Two years
UPC	819130029917

NOte:


\*: Rated Amps(A) / accorded UL 60335 Safety

## Product Images

### Sleek Design with Touch Control

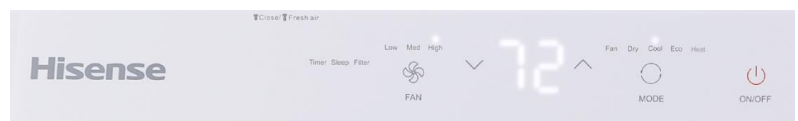

### Window Opening

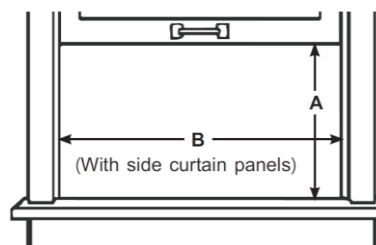

A: 19 1/7" (48.6cm) min

B: 32 1/3" (82.2cm) - 44" (111.8cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA,30024  
1-888-935-8880  
www.hisense-usa.com