

# Hisense

## 70 PINT

up to 500 sq.ft

**DEHUMIDIFIER AUTO-DRY**



### Model: DH-70K1SDLE

- Removes 70 pints of moisture every 24 hours
- 3 Modes - Auto, Continuous, Manual
- 2 Fan Speeds
- Low-temperature Operation (38 deg F)



#### Bucket full indicator

Avoids overflow and reminds you when the bucket is full



#### Filter Indicator

Washable filter helps to reduce bacteria, odors and particles



#### Electronic Control

Electronic push-button controls with digital LED display



#### Warranty

2 Years Parts & Labor

## Cool Comfort - Contolled humidity levels prevent damage, and keep your home smelling fresh

The Hisense DH-70K1SDLE Energy Star 70-Pint 2-Speed Dehumidifier is an affordable and eco-friendly dehumidifier removing 70 pints of moisture per day operating at temperatures as low as 38 degrees Fahrenheit. Three operating modes (manual set, continuous and auto dry) make this Energy Star unit a versatile choice. During the dehumidification process, water accumulates in the 1.8 gallon water tank or is continuously emptied into a drain using a drainage hose such as a standard garden hose (hose not included). Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shutoff.

## TECHNICAL SPECIFICATIONS

### Performance

Hisense-Model	DH-70K1SDLE
Dehumidification (Pints/24 hrs)	70 (DOE Test Procedure)
Heating Capacity	N/A
Coverage	Up to 500 sq. ft.
Refrigerant	R-410A
Noise Level in dB(A)	53 ~ 55 dB(A)

### Electrical

Voltage / Freq / Amps	115V/60Hz / 6.9 A
-----------------------	-------------------

### Control Features

Unit Control Type	Electronic
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	(30% ~ 80%)
Timer-Clock	Yes
Fan Speeds	2 speeds (Lo, Hi, Auto)
Auto Bucket Shutoff	Yes
Pump Mode	No

### General Features

Auto Bucket Shutoff	Yes
Bucket Capacity	14.4 pints
Bucket Shutoff Capacity	11.6 pints
Garden Hose Connection	Yes (image below)
Washable Filters	Yes

### Accessories

Quick Connect Hose	None
--------------------	------



### Approvals

Safety	UL, CUL
Energy	Energy Star / CEC
Parcel Shippable	Yes



### Shipping

Unit Dimension WxDxH (mm)	383 X 290 X 628
Carton Dimension WxDxH (mm)	435 X 336 X 668
Unit Dimension WxDxH (inch)	15 X 11.4 X 24.7
Carton Dimension WxDxH (inch)	17.1 X 13.3 X 26.3
Net Weight /Gross Weight (Kg)	20.5/23.3
Net Weight /Gross Weight (lbs)	45.1/51.1
Loading(40HQ)	746

### WARRANTY/UPC

Parts & Labor	2 years
UPC	854098003739

### Control panel

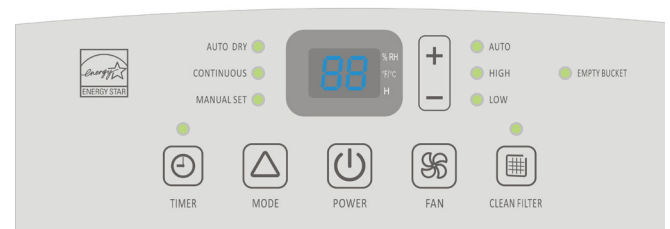

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2016 Hisense USA. All rights reserved

Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-888-935-8880  
www.hisense-usa.com