

# Hisense

**50 PINTS**  
DOE Test Procedure,  
10 CFR part 430,  
subpart B, appendix X)

**70 PINTS**  
DOE Test Procedure,  
10 CFR part 430,  
subpart B, appendix X)

**DEHUMIDIFIER SMART CONTROL**  
up to 1000 sq.ft. coverage

**DH7019W1WG**



works with the  
Google Assistant

WORKS WITH  
alexa

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



- Bucket full indicator avoids overflows
- 3 Modes - Auto, Continuous, Manual
- 2 Fan Speeds (High, Low, Auto)
- Low-temperature Operation (38°F)



#### HiSmart™ Control

HiSmart technology allows you to control your dehumidifier with a smartphone from any location.



#### Low Noise Airflow System

High-performance centrifugal fan ensures quiet operation, achieving just 46 dB(A) with the fan set on "Low".



#### Energy Efficient

Energy Star means its more energy efficient and helps reduce your utility bill.



#### Filter Indicator

Washable filter helps to reduce bacteria, odors and particles.



#### Warranty

2 Years Parts & Labor.

## HiSmart™ Dehumidifier - Control humidity levels and keep your home smelling fresh from anywhere you are

The Hisense DH7019W1WG HiSmart 70\* Pint 2-Speed Dehumidifier conveniently controls humidity in your home from anywhere you are. With cloud-based connectivity via your iOS or Android smartphone, and the free HiSmart Air App, you'll always be able to keep tabs on things at home. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Three operating modes (manual set, continuous and auto dry) and the very low sound level make this a versatile choice. Additional features include a programmable 24-hour on/off timer, adjustable humidistat, and full-tank alert/shutoff.

# Hisense

**50 PINTS**  
DOE Test Procedure,  
11CFR part 430,  
subpart B, appendix X1

**70 PINTS**  
DOE Test Procedure,  
11CFR part 430,  
subpart B, appendix X1

**DEHUMIDIFIER SMART CONTROL**  
up to 1000 sq.ft. coverage

**DH7019W1WG**

## TECHNICAL SPECIFICATIONS

Performance	
Hisense-Model	DH7019W1WG
Dehumidification (Pints / 24 hours)	70*
Dehumidification (Pints / 24 hours)	50**
Heating Capacity	N/A
Coverage	Up to 1000 sq. ft.
Refrigerant	R-410A
Noise Level in dB(A)	46-49 dB(A)
Electrical	
Voltage / Freq / Amps	115V / 60Hz, 6.3A* / 4.9A**
General Features	
Unit Control Type	HiSmart Air App Controllable
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	30% ~ 80%
Timer-Clock	Yes
Fan Speeds	2 Speeds (Lo, Hi, Auto)
Pump Mode	No
General Features	
Auto Bucket Shutoff	Yes
Bucket Capacity	16.3 pints
Bucket Shutoff Capacity	13.3 pints
Garden Hose Connection	Yes - garden hose not included
Washable Filters	Yes
Max Pump Discharge Height	N/A
Accessories	
Quick Connect Hose	No
HiSmart™ Air App	Yes (iOS and Android)
Approvals	
Safety	UL
Energy	Energy Star
Shipping	
Unit Dimension WxDxH (mm)	387 x 300 x 628
Carton Dimension WxDxH (mm)	430 x 332 x 667
Net Weight / Gross Weight (Kg)	18.9 / 20.8
Unit Dimension WxDxH (inch)	15.2 x 11.8 x 24.7
Carton Dimension WxDxH (inch)	16.9 x 13.1 x 26.3

Net Weight / Gross Weight (lbs)	41.6 / 45.8
Loading (40HQ)	774
Loading (53')	864 (floor loaded)
Product	
Parts & Labor	2 years
UPC	00819130023694

Note:


\*: DOE Test Procedure 10 CFR part 430, subpart B, appendix X;

\*\* : DOE Test Procedure 10 CFR part 430, subpart B, appendix X1;

## HiSmart™ Air Home Appliance System



Control Panel

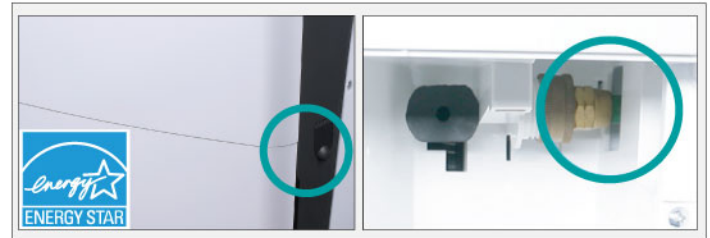

Gravity Draining with Garden Hose (not included)

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved



Hisense USA Corporation  
7310 McGinnis Ferry Road, Suwanee, GA, 30024  
1-877-465-3566  
www.hisense-usa.com

115 Volts  
60Hz  
15A