

Hisense

550
SQ.FT

DUAL HOSE PORTABLE AIR CONDITIONER
SACC 10,000BTU
WITH HEAT PUMP 10,000 BTU

Model **AP1021HR1GD**



- Dual-hose design operates as a true air conditioner
- Heat function provide year-round comfort in temperate climate
- Cool, Heat, Dehumidify, and Fan Functions
- Remote Control is Included
- 2-year Warranty



Dual-Hose Design Provides Faster Cooling by eliminating the vacuum effect of standard portable air conditioners



4 Modes - Cool, Heat, Dehumidify, and Fan



Quiet Operation



Drain-free Operation (Cooling mode)



Easy Snap-Together Window Kit

Quiet, Efficient Cooling with Heat Function and Quick Installation

The Hisense AP1021HR1GD Portable Air Conditioner provides Fast Cooling with its Dual Hose design, by eliminating the vacuum effect of standard portable air conditioners. Also, with 10,000 BTUs of heat, combined with cool, dehumidify, and fan modes, is versatile for year-round use in temperate climates. Airflow is strong and quiet because of the cross-flow fan design. The additional LED display on the front panel can be easily seen from across the room. The easy-to-install snap-together window kit fits windows 25" to 50" wide, helping preserve the external appearance of your home.

Model #	AP1021HR1GD
Performance	
Maximum Cooling space	550 sq.ft.
Cooling Capacity - SACC (BTU)	10,000
CEER	7.8
Heating Capacity (BTU)	10,000
Dehumidification Pint / 24 hr (at 26.7 / 19.4° C)	79.2
Refrigerant	R-32
Airflow (CFM)	165 – 215
Noise Level in dB(A)	50 - 53
Electrical	
Voltage / Freq / Amps	115V / 60Hz, 12A* / 11.4A
Plug Type / NEMA#	A / 5-15P
Power Cord Length (feet)	4.9
Control Features	
Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	61 - 86 °F
Display Type	Dimmable LED
Sleep Mode	Yes (on remote)
Dehumidifier Mode	Yes
Cooling Speeds	3 Speeds
Temp Display Units	°C / °F
Timer	1 Hr - 24Hr On/Off
Auto Restart	Yes (after power is restored)
General Features	
Removable Filter	Yes
Washable PP Filter	Yes
Oscillating Air Vent Louvers	Yes (on remote)
Vent System	Dual Hose 5.9"0 x 59"L
Accessories	
Remote Control	Yes
AAA Batteries	Yes
Air Hose	Yes
Window Kit	Yes
Approvals	
Safety	ETL
Energy Star	No

Product Dimensions	
Unit Dimension W x H x D (mm)	442 x 738 x 365
Net Weight (Kg)	36.3
Unit Dimension WxHxD (inch)	17.4 x 29.1 x 14.4
Net Weight (lbs)	80
Product	
Parts & Labor	2 years
UPC	819130027425


Note:

*: Rated Amps(A) / accorded UL 60335 Safety

Control Panel



Window Size

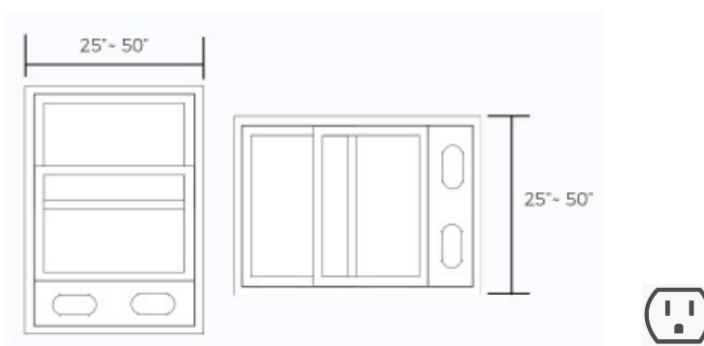

The window installation kit allows you to install the air conditioner in most vertical sliding windows 25" to 50" wide, or horizontal sliding windows from 18" to 50" high.

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2021 HisenseUSA. All rights reserved

HisenseUSA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-877-465-3566
www.hisense-usa.com