



Model AP0921CR1G



Cool Comfort – Quiet, Convenient, and Quick Installation

The Hisense AP0921CR1G Portable Air Conditioner provides convenient performance. Long-distance airflow is strong, cool, and quiet because of the new air flow design. Additionally, the air louver automatically opens to a preset position after the unit is powered on and can be adjusted with the included remote. The easy-to-install snap-together window kit fits windows 18" to 50" wide, helping preserve the external appearance of your home.

All product.product specifications. and data are subject to change without notice to Improve reliability. function.design or otherwise. ©2021 Hisense USA. All rights reserved

Hisense



Model #	AP0921CR1G	
Performance		
Maximum Coolingspace	400 sq.ft.	
Cooling Capacity - SACC (BTU)	9.000	
CEER	7.5	
Dehumidification Pint / 24 hr	81.6	
(at 26.7 / 19.4' C)		
Refrigerant	R-32	
Airflow (CFM)	165 – 215	
Noise Level in dB(A)	49 - 52	
Electrical		
Voltage / Freq / Amps	115V / 60Hz, 12A* / 10A	
Plug Type / NEMA#	A / 5-15P	
Power Cord Length (feet)	4.9	
Control Features		
Unit Control Type	Electronic	
Fan Control	Button	
Thermostat Control	61 - 86 °F	
Display Type	Dimmable LED	
SleepMode	Yes (on remote)	
DehumidifierMode	Yes	
Cooling Speeds	3 Speeds	
Temp Display Units	° c/° F	
Timer	1 Hr - 24Hr On/Off	
Auto Restart	Yes (after power is restored)	
General Features		
Removable Filter	Yes	
Washable PP Filter	Yes	
Oscillating Air Vent Louvers	Yes (on remote)	
Vent System	Single Hose.5.9"0 x 59"L	
Accessories		
Remote Control	Yes	
AAA Batteries	Yes	
Air Hose	Yes	
Window Kit	Yes	
Approvals		
Safety	ETL	
Energy Star	No	

Product Dimensions		
Unit Dimension W x H x D (mm)	442 x 738 x 318	
Net Weight (Kg)	33	
Unit Dimension WxHxD (inch)	17.4 x 29.1 x 12.5	
Net Weight (lbs)	72.7	
Product		
Parts & Labor	2 years	
UPC	819130027395	


Note:

*: Rated Amps(A) / accorded UL 60335 Safety

Control Panel



Window Size

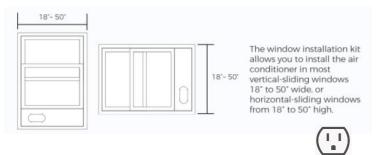

All product. product specifications. and data are subject to change without notice to improve reliability. function. design or otherwise. ©2021HisenseUSA. All rights reserved

HisenseUSA Corporation 7310 McGinnis Ferry Road. Suwanee. GA. 30024 I ·877-465-3566

www.hisense-usa.com